ÇİZMAK®

# P50



## Dik Pnömatik Bağlama Elemanları

**Dik Silindir Eklentili**

Açılı yapısı sayesinde yer kazandırır. Yatay veya dikey montaj yapılabilir.
Pnömatik silindiri ile donatılmıştır, çift hareketli, değiştirilebilir yapıda montajlıdır.
Silindir pistonu hareketi manyetik algılayıcılarla sınırlanabilir.
Ayarlanabilir hıza sahiptir.
Sıkma mekanizması galvanize ve passivizedir. Sertleştirilmiş ve yağlanmış burçlar içinde paslanmaz çelik perçinlenir. İslah edilmiş ve galvanize MS10/20 baskı cıvatasıyla birlikte komple.


## *Pneumatic toggle clamp*


***with vertical cylinder.***

*Space-saving angled form. Can be mounted vertically or horizontally.*
*Fitted with pneumatic cylinder, double-acting, replaceable.*
***Magnetic piston for end-position monitoring.***
*Adjustable speed.*
*Clamp are galvanized and passivated. Stainless steel rivets running in case-hardened bushes.*
*Bearings are pre-lubricated.*
*Complete with tempered, galvanized clamping screw MS10/20*



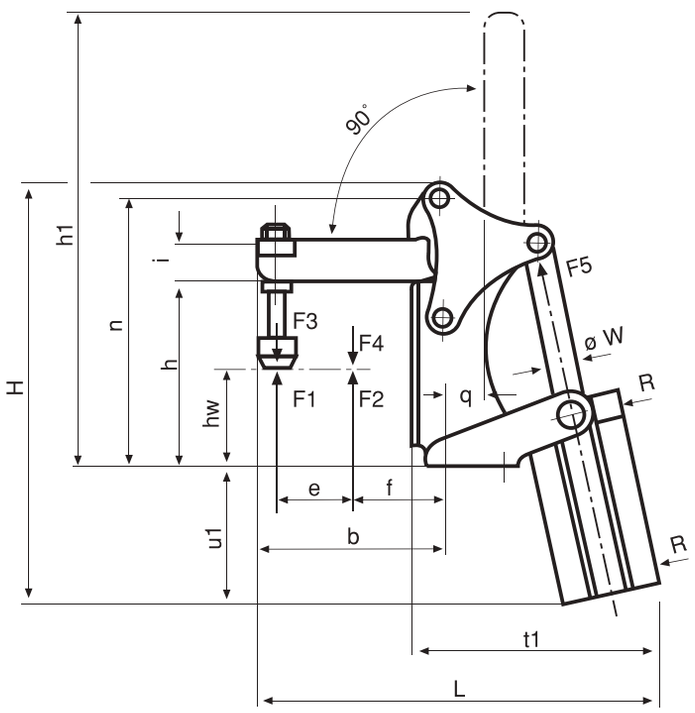


| Sipariş No *Order No* | F1 ⇧ (kN) | F2 (kN) | F3* ⇩ (kN) | F4 (kN) | ⇦ F5 (kN) | Vn** | | | | g |
|---|---|---|---|---|---|---|---|---|---|---|
| **P50/2** | 1.0 | 1.2 | 0.7 | 1.0 | 0.30 | 0.26 | 170 | 130 | M6 x 35 | 800 |
| **P50/3** | 1.4 | 2.5 | 0.6 | 1.1 | 0.50 | 0.35 | 205 | 160 | M8 x 45 | 1100 |
| **P50/4** | 2.0 | 3.0 | 1.5 | 2.2 | 0.75 | 0.08 | 260 | 220 | M8 x 65 | 1600 |

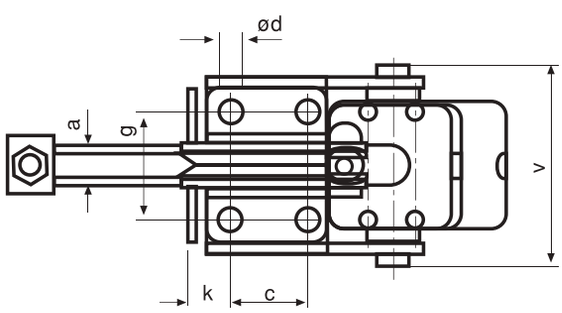*F3 + F4 = 6 bar basınçta elde edilebilecek max. kuvvet.

**Vn = 6 bar basınçta çift hareket için hava tüketimi ($dm^3$)

| Sipariş No *Order No* | a | b | c | ød | e | f | g | h | h1 | h3 | h4 | h5 | hw | i | k | n | q | t1 | u1 | v | øw | Strok | Silindir Piston çapı | R |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **P50/2** | 6 | 56 | 12.5 | 5.5 | 27 | 24 | 27.0 | 65 | 145 | 16 | 12.5 | 12.5 | 37 - 46 | 12 | 16 | 94 | 8 | 90 | 70 | 62 | 10 | 42 | 25 | M5 |
| **P50/3** | 8 | 82 | 16.0 | 6.5 | 412 | 30 | 25.4 | 72 | 185 | 18 | 16.0 | - | 38 - 50 | 18 | 16 | 108 | 13 | 105 | 90 | 70 | 12 | 52 | 32 | G 1/8 |
| **P50/4** | 10 | 101 | 32.0 | 8.5 | 61 | 30 | 45.0 | 100 | 240 | 22 | 32.0 | 32.0 | 50 - 79 | 20 | 17.5 | 145 | 22 | 135 | 105 | 85 | 16 | 62 | 40 | G 1/8 |

Piston çapı x=$F_5$ 6 bar çalışma basıncında elde edilen piston kuvveti için gereken silindir çapı


*Tel :+90 212 594 40 38 - 39 Web : www.cizmak.com.tr E-mail : info@cizmak.com.tr*